


Technical Data Sheet

PGR 3200

Product Description

PGR 3200 is produced of rubber granules. The product is obtained by adding a PUR binder to the rubber granules and compressing them in a mould to the target density.

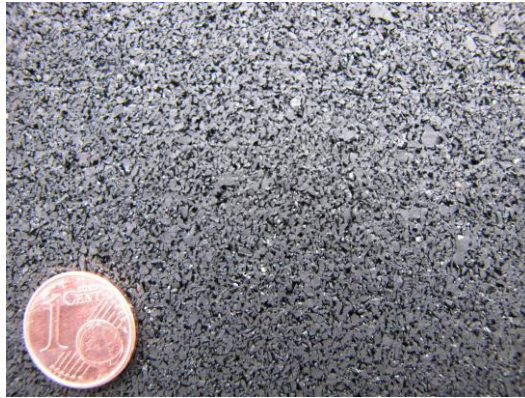

Technical specifications

Properties	Specifications	Unit	Method
Density	730 - 830	kg/m ³	ISO 845
Tensile Strength	> 600	kPa	ISO 1798
Elongation	> 50	%	ISO 1798
Thermal resistance	0,0480	m ² K/W	ISO 8302
Thermal conductivity	0,1046	W/mK	ISO 8302
Fire classification (thickness ≥ 4 mm)	E		DIN EN 13501-1 DIN EN ISO 11925-2
Impact Sound Improvement Level ΔL_w (thickness ≥ 6 mm)	approx. 21	dB	ISO 140-8

Country of origin: Germany



GuKoTech GmbH

Galgenbergstr. 9

D-72622 Nuertingen

Telefon +49 (0) 7022 - 501-342

Germany

published on: 08/2013

All data are typical values provided by our internal control system